

## REGULATORY COMPLIANCE

FSRS ELECTRONIC PRODUCTS have been tested for compliance with: FCC Class A and CE. The Power Adapter has been tested for compliance with: UL, CSA and CE.

## WARRANTY POLICY

This product is warranted against failures due to defective parts or faulty workmanship for a period of one year after delivery to the original owner. During this period, FSR will make any necessary repairs or replace the unit without charge for parts or labor. Shipping charges to the factory or repair station must be prepaid by the owner, return-shipping charges, via UPS / FedEx ground, will be paid by FSR.

This warranty applies only to the original owner and is not transferable. In addition, it does not apply to repairs done by other than the FSR factory or Authorized Repair Stations.

This warranty shall be cancelable by FSR at its sole discretion if the unit has been subjected to physical abuse or has been modified in any way without written authorization from FSR. FSR's liability under this warranty is limited to repair or replacement of the defective unit.

FSR will not be responsible for incidental or consequential damages resulting from the use or misuse of its products. Some states do not allow the exclusion of incidental or consequential damages, so the above limitations may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

Warranty claims should be accompanied by a copy of the original purchase invoice showing the purchase date (if a Warranty Registration Card was mailed in at the time of purchase, this is not necessary). Before returning any equipment for repair, please read the important information on service below.

## SERVICE

Before returning any equipment for repair, please be sure that it is adequately packed and cushioned against damage in shipment, and that it is insured. We suggest that you save the original packaging and use it to ship the product for servicing. Also, please enclose a note giving your name, address, phone number and a description of the problem.

**NOTE: all equipment being returned for repair must have a Return Authorization (RMA) Number. To get a RMA Number, please call the FSR Service Department (973-785-4347).**

**Please display your RMA Number prominently on the front of all packages.**

## Contact Information:

244 Bergen Boulevard,  
West Paterson, NJ 07424

Tel: (973) 785-4347 · Fax: (973) 785-4207

E-Mail: sales@fsrinc.com · Web: <http://www.fsrinc.com>

issue date: 10-03



## YUV - 6

### 400 MHz DISTRIBUTION AMPLIFIER VIDEO AND DIGITAL AUDIO OPERATIONS MANUAL



244 Bergen Boulevard, West Paterson, NJ 07424  
Tel: (973) 785-4347 · Fax: (973) 785-4207  
E-Mail: sales@fsrinc.com  
Web: <http://www.fsrinc.com>

LIT1028  
43869

## PROPRIETARY INFORMATION

All information in this manual is proprietary to and the property of FSR inc. This publication is protected by the Federal Copyright Law, with all rights reserved. No part of this document may be reproduced, transcribed, or transmitted, in any form or by any means, without prior explicit written permission from FSR inc.

## Operators Safety Summary

*The general safety information in this summary is for operating personnel.*

**Do Not Remove Covers or Panels** There are no user-serviceable parts within the unit. Removal of the top cover will expose dangerous voltages. To avoid personal injury, do not remove the top cover. Do not operate the unit without the cover installed.

**Power Source** This product is intended to operate from a power source that will not apply more than 230 volts rms between the supply conductors or between both supply conductor and ground. A protective ground connection by way of grounding conductor in the power cord is essential for safe operation.

**Grounding the Product** This product is grounded through the grounding conductor of the power cord. To avoid electrical shock, plug the power cord into a properly wired receptacle before connecting to the product input or output terminals. A protective-ground connection by way of the grounding conductor in the power cord is essential for safe operation.

**Use the Proper Power Cord** Use only the power cord and connector specified for your product. Use only a power cord that is in good condition. Refer cord and connector changes to qualified service personnel.

**Use the Proper Fuse** To avoid fire hazard, use only the fuse having identical type, voltage rating, and current rating characteristics. Refer fuse replacement to qualified service personnel.

**Do Not Operate in Explosive Atmospheres** To avoid explosion, do not operate this product in an explosive atmosphere.

Output Impedance: 75 Ohms  
Propagation Delay: 15 nS max  
Rise Fall Time: 1 nS

### Digital Audio Input

Number/Type: 1 Dolby Digital, DTS, AES/EBU, SP/DIF  
Connectors: 1 female BNC  
Impedance: 510 Ohms  
Nominal Level: 1V (consumer), 2V (professional)  
Min/Max Levels: 0.5V p-p to 5V p-p  
Sampling Rates: 32 kHz, 44.1 kHz, 48 kHz, 96 kHz


### Digital Audio Output

Number/Type: 6 Dolby Digital, DTS, AES/EBU, SP/DIF  
Connectors: 6 female BNC  
Impedance: 75 Ohms  
Output Level: 2.4V p-p into 75 Ohms  
Propagation Delay: 15 nS max  
Rise Fall Time: 1 nS max

### General

Power: 100VAC to 240VAC, 50/60 Hz, internal, autowatch  
0.65A/115V, 0.4A/230V  
Enclosure: Metal 1 Rack Unit

Graph A shows the response curves of a 150 foot section of West Penn 8255 mini-coax cable with and without the YUV-6 being driven by a full .7V signal. Notice that by itself, the cable's -3dB bandwidth is only 17 MHz, but when used with the RGB-4/6, the bandwidth is restored to 180 MHz at the end of the 150 foot cable.

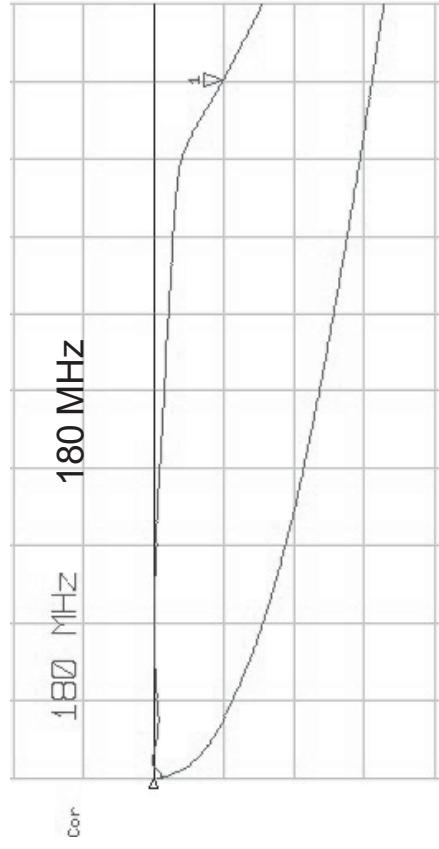

## TECHNICAL SPECIFICATIONS

## INTRODUCTION

**Video Input**  
Number/Type: 1 RGBS (audio channel not used), RGsB, RsGsBs,  
Connectors: Component video, S-video, Composite video  
Connectors: 3 or 4 female BNC (the fourth can be used for digital  
audio instead of sync)

Impedance: 510 Ohms

Input Levels:

RGB 0.7V p-p  
Y of component video 1V p-p

S-video 1V p-p

Composite video 1V p-p  
R-Y, B-Y component video 0.3V p-p

C of S-video 0.3V p-p

Min/Max Levels: 0.3V p-p to 1.5V p-p with no offset

Horizontal Frequency: 15kHz to 180kHz

Vertical Frequency: 15Hz to 170Hz

Differential phase error: 0.2 degrees at 3.58 MHz (NTSC), 4.43 MHz  
(PAL)  
Differential Gain error: 0.1% at 3.58 MHz (NTSC), 4.43 MHz (PAL)

## Video Output

**Video Output**  
Number/Type: 6 RGBS (audio channel not used), RGsB, RsGsBs,  
Connectors: Component video, S-video, Composite video  
Connectors: 6 groups of 4 BNC

Impedance: 75 Ohms

Output Levels:

RGB 0.7V p-p  
Y of component video 1V p-p

S-video 1V p-p

Composite video 1V p-p  
R-Y, B-Y component video 0.3V p-p

C of S-video 0.3V p-p

Min/Max Levels: 0.3V p-p to 1.5V p-p  
DC offset: +/-20mV maximum with input at 0V offset

## Sync

**Sync**  
Input Level: Analog or TTL 0.5V to 5V p-p  
Output Level: 5V into Hi-Z 2.4V into 75 Ohms  
Input Impedance: 510 Ohms

The all new YUV-6 is a ultra high resolution, ultra high bandwidth, one input by six outputs, distribution amplifier suitable for applications requiring the highest possible video and audio quality. The first two outputs have independent cable equalization permitting long cable runs while maintaining excellent signal integrity for even the highest video resolutions.

Not only does this equipment have over 400 MHz of video bandwidth but it also has the unique FSR advanced synchronizing circuitry to ensure a rock stable video image at any resolution and signal level. The first two outputs are independently equalized to maintain excellent signal integrity for all video resolutions. Cable runs of up to 175 feet are possible with 180 MHz of full amplitude bandwidth and +/- 0.75 dB flatness to 130 MHz. A 0.2V P-P input signal yields 316 MHz of bandwidth and +/- 0.5 dB flatness to 250 MHz. This means that the signal you feed into the YUV-6 will arrive at the far end of the cable with an almost immeasurable amount of loss and no distortion due to peaking effects.

The digital audio input accepts DTS, AES/EBU as well as SP/DIF signals with sampling rates up to 96 kHz. Extremely low jitter and sub nano-second rise and fall times insure transparent audio signal distribution.

The YUV-6 accepts and distributes RGBS, RGsB, RsGsBs, component video, S-video, composite video, and digital audio on 75 Ohm female BNC connectors.

Even using standard 75 ohm BNC connectors the RGB-4 and 6 are housed in a 1RU metal enclosure freeing up valuable rack space.

FSR also manufactures many other signal handling products that make any video installation quick and professional.

## FEATURES

- Minimum 400 MHz of bandwidth
- +/- 0.5 dB flatness to 300MHz
- Advanced synchronizing circuitry
- 75 Ohm BNC connectors for the input and each output
- Independent cable equalization control for the first two output channels
- Compatible with all RGB-HV, HD TV and DVD standards
- Internal universal power supply

## APPLICATIONS

- Boardrooms • Houses of Worship • Control rooms
- Classrooms • Staging and Rental

## TYPICAL APPLICATION

**INSTALLATION and OPERATION**  
**Do not connect the power line cord until all the video connections are completed.**

Mount the unit in the equipment rack.

Connect all the audio (if used) and video cables per the diagram.

Connect the power cord.

Perform the final operational check.

Adjust the cable equalization, available on the first two output channels, with the variable control (one for each of the two output channels) for minimum distortion using an appropriate test signal or full motion video.

\* THIS INPUT CAN ALSO CARRY  
COMPOSITE SYNC FOR RGB'S APPLICATIONS

