

MOUNTING POLE ACCESSORIES:

CAUTION: DERATE POLE LOAD LIMITS FOR OFF CENTER LOADS:

LOCATE THE CENTER OF GRAVITY FOR ASSEMBLED ACCESSORIES TO BE MOUNTED TO THE THREADED INSERT ON THE CB UNIT. FOR POLE LOADS WITH CENTER OF GRAVITY NOT LOCATED IN THE CENTER OF THE PIPE THE MAXIMUM LOAD THE CB CAN SUPPORT MUST BE DERATED.

FOR LOADS LOCATED BETWEEN:


0" AND 5" FROM THE CENTER OF THE THREADED INSERT THE MAXIMUM LOAD IS 100LB.

10" FROM THE CENTER OF THE THREADED INSERT THE MAXIMUM LOAD IS 50LB.

NOTE: MAXIMUM POLE LOAD INCLUDES ALL MOUNTED ACCESSORIES

NOTE: POLE LOAD CENTER OF GRAVITY MUST BE BETWEEN THE 4 CB MOUNTING POINTS

NOTE: SET SCREW MUST BE TIGHTENED TO PREVENT LOAD ROTATION

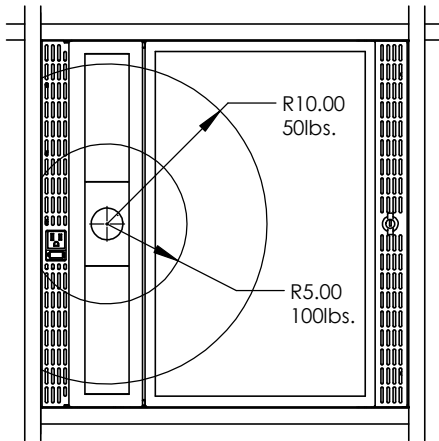

FSR inc.
244 BERGEN BLVD.
WOODLAND PARK, NJ 07424
TEL (973) 785-4347
FAX (973) 785-3318

TITLE:			
CB-22P+			
DRAWN BY: JRE	DATE: 12/04/23	REV: 01	
DWG#: CB-22P+	PAGE: 1 OF 1	SCALE: 1:6	