


MOMENTARY & MAINTAINED SWITCH WIRING



RESISTORS REQUIRED FOR LED (INCLUDED)


UP TO 5 V, USE THE SMALL SIZE RESISTOR (150 OHM)

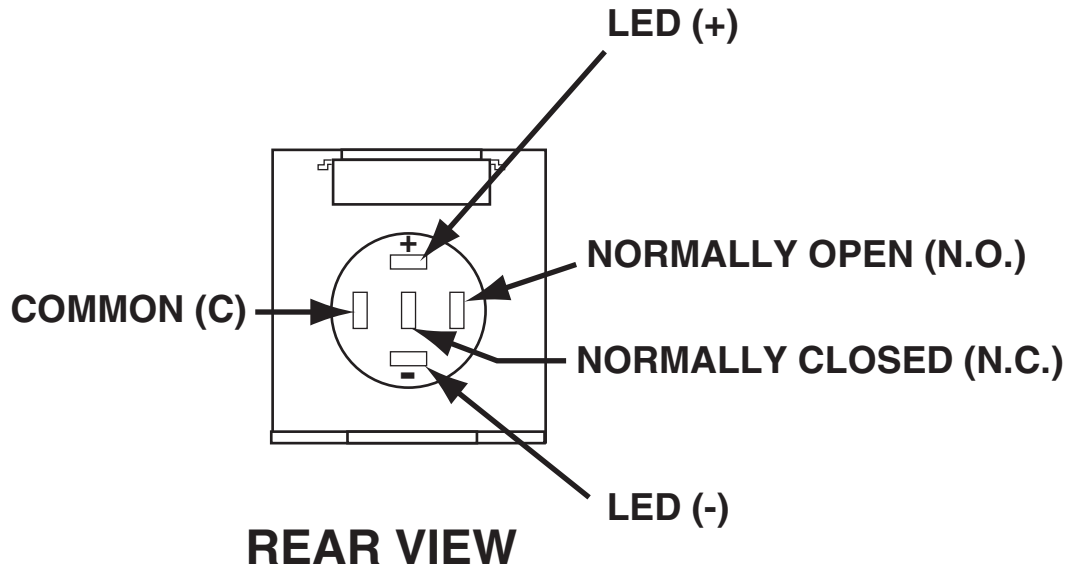


UP TO 12 V, USE THE MEDIUM SIZE RESISTOR (470 OHM)



UP TO 24 V, USE THE LARGE SIZE RESISTOR (1.1 K)



TYPICAL FSR APPLICATION

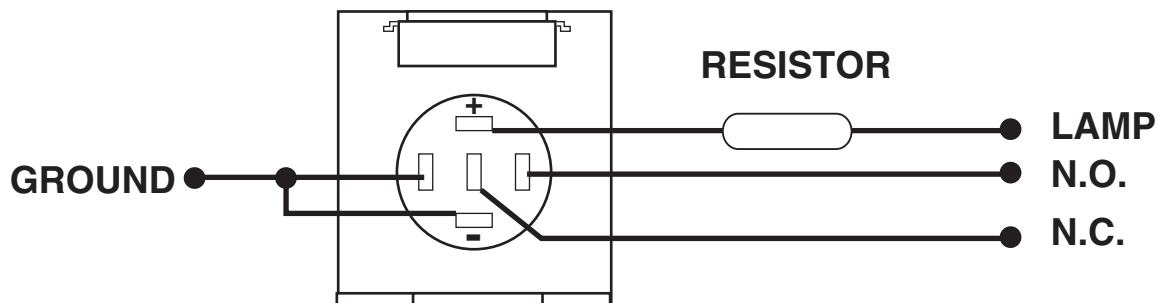

THE LED IN THE SWITCH ASSEMBLY IS RATED AT 20 ma.
IF THE DEVICE DRIVING THE LED IS CURRENT LIMITED
TO 20 ma OR LESS, THE SERIES RESISTOR IS NOT REQUIRED.

FSR

244 BERGEN BLVD.
WEST PATERSON, NJ 07424
PH.#: (973)785-4347

MOMENTARY & MAINTAINED SWITCH WIRING

PRINT FILE: I:\...\C-1015A.pdf

FILE NAME: C-1015A

SCALE: NA

DATE: 03/22/07

APPR'V'D: