
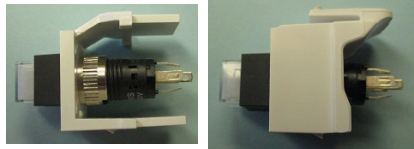


MOMENTARY & MAINTAINED SWITCH WIRING

REAR VIEW



KEYSTONE
LATCH

COMMON (C)

Note 2:
White print on switch
body indicates LED(-)
terminal to aide in
switch orientation.

LED (+)

NORMALLY OPEN (N.O.)

NORMALLY CLOSED (N.C.)

LED (-)


Note 1:
Keystone insert may vary
in appearance, but the latch
will always be on top in this
drawing for the purposes
of orientation.

RESISTORS REQUIRED FOR LED (INCLUDED)

UP TO 5 V, USE THE SMALL SIZE RESISTOR (150 OHM)




UP TO 12 V, USE THE MEDIUM SIZE RESISTOR (470 OHM)



UP TO 24 V, USE THE LARGE SIZE RESISTOR (1.1K)



TYPICAL FSR APPLICATION

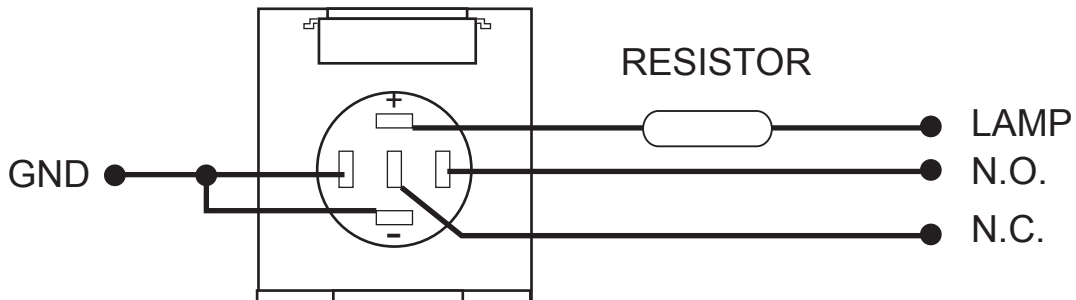

THE LED IN THE SWITCH ASSEMBLY IS RATED AT 20 ma.
IF THE DEVICE DRIVING THE LED IS CURRENT LIMITED
TO 20 ma OR LESS, THE SERIES RESISTOR IS NOT REQUIRED.

FSR

244 BERGEN BLVD.
WEST PATERSON, NJ 07424
PH.#: (973)785-4347

MOMENTARY & MAINTAINED SWITCH WIRING

PRINT FILE: I:\...\C-1015B.pdf

FILE NAME: C-1015B

SCALE: NA

DATE: 03/22/07

APPR'V'D: