

# ML-500

## Ballroom Combining System



Audio Products Group

ML-500



Audio combining and microphone control for 2 to 4 rooms has never been more cost effective and efficient!


Designed for the smaller meeting spaces, the ML-500 is perfect for those areas that require background music and multiple microphones per room.

Along with hotels and conference centers, the ML-500 is perfect for churches, country clubs, gymnasiums, funeral homes, banquet halls, and general divisible meeting spaces.

Provisions are made for the control of up to four separate rooms. Rooms may be used independently or mixed to either of two separate mix busses for full flexibility. Local control plates in each room provide control over microphone and music functions, room volume and mix bus assignment. The heavy gauge steel security cover locks to prevent unauthorized tampering of the room settings while adding to the durability of the system. Since mixing is accomplished at the local wall-plates, access to the rack area is not required for setup. The ML-500 may be used with any brand of amplifier or mixer, allowing the system to be tailored to specific user requirements or easily retrofitted into existing areas.

## FEATURES

- Combines audio from two to four rooms in any combination.
- All operating features are controllable from local room areas.
- Only 7 wires (control only) connect the wallplates to the main unit.
- Rooms may be independent or mixed to either of two busses.
- May be used with any mixers and amplifiers.
- Eliminates patch panels and "homemade" systems.
- All audio equipment can be located in one place.
- Robust design and construction insures years of trouble-free operation

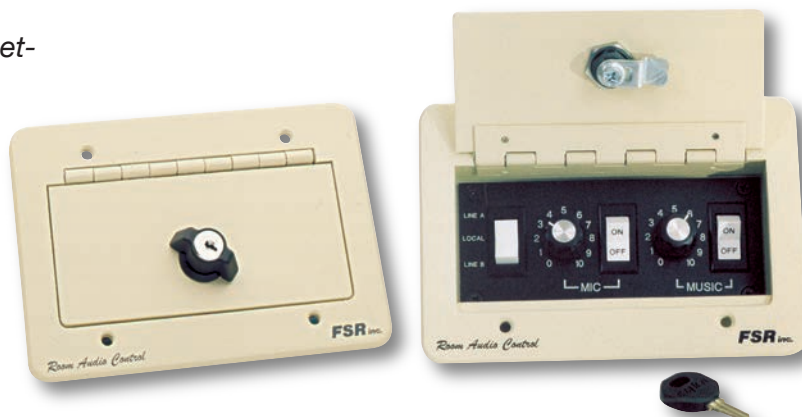

## FSR Inc.

244 Bergen Boulevard, Woodland Park, NJ 07424  
 Phone: 973.998.2300 · Fax: 973.785.4207  
 Web: [www.fsrinc.com](http://www.fsrinc.com) · E-mail: [sales@fsrinc.com](mailto:sales@fsrinc.com)  
 Toll Free: 1-800-332-FSR1

LIT1264A

## SYSTEM COMPONENTS

**ML-500 Control Unit:** 19 inches wide by 1 $\frac{3}{4}$ " high by 10 $\frac{1}{2}$  inches deep. The rack-mountable control unit contains all active circuitry. Front panel status indicators monitor power supply voltages. An adjustable music bus control is provided. The unit is equipped with six-foot cable to connect to the power supply.

**Power Supply:** 5 inches wide by 2 $\frac{3}{4}$  inches high by 4 $\frac{1}{2}$  inches deep. PM-2 power supply provides all necessary voltages required by the ML-500 Control Unit. The PM-2 is rear-rack mountable and connects to standard 120 VAC power. To prevent overload, no other devices should be powered from the PM-2 when used with the ML-500.

**Local Control Plates:** Wall-mount local control plate mounts in any 3-gang wall box with a minimum 2 $\frac{1}{2}$  inch depth. It provides control of microphone on/off, music on/off, room volume, and Mix Bus A / Mix Bus B / local. An eight-conductor 22 AWG cable (e.g. West Penn #271) connects the wallplate to the control unit. No audio signals are carried by this cable.

## SPECIFICATIONS

**Mixer Input Connectors:** four 3-pin screw terminals.

**Input Impedance:** Electronically balanced 20 Kohm (unbalanced 10 Kohm).

**Background Music Input:** 3 pin screw terminals, 10K ohm impedance, music level pot (rear panel) allows practical adjustment range of -20db to +6db.

**Audio Output Connectors:** four 3-pin screw terminals.

**Output Impedance:** 600 ohm transformer-coupled.

**Output Level:** +18dbv maximum.

**Microphone Volume Control Range:** -20dB to +4dB.

**Music Volume Control Range:** -18db to +3db relative to input signal level.

**Residual Noise:** better than -75dbv — input floating, outputs 600 ohm load, microphone and music switches on.

**Crosstalk:** better than -80db at 1 kHz (relative to +10dbv) input signal.

**Frequency Response:** -1+0dB, 30Hz - 20 kHz.

**Power Consumption:** 120 VAC, 50/60Hz at 25 watts maximum.

## LOCAL CONTROL PANELS

Local control panels in each room area allow selection of all system functions. A locking cover plate on each panel regulates access to the controls. Each panel has the following features:

**Mix Bus Selector:** The leftmost rocker switch allows the room's mixer to be assigned to either of two mix busses (Line A or Line B) or its own independent bus (local).

**Microphone On/Off:** This rocker switch enables/disables the room's mixer.

**Music On/Off:** The third rocker switch allows audio from the background music bus to be turned on and off.

**Music Volume/Mic Volume:** These volume control pots set the audio level to each room area.



## ORDERING INFORMATION

- 1) The ML-500 comes complete as a four-room system, including the audio control unit, four local control plates, and a PM-2 power supply.
- 2) ML-500-RK. The system as listed above with a rack mount panel to mount the local control plates in the rack instead of the rooms.



244 Bergen Boulevard, Woodland Park, NJ 07424  
Phone: 973.998.2300 · Fax: 973.785.4207  
Web: [www.fsrinc.com](http://www.fsrinc.com) · E-mail: [sales@fsrinc.com](mailto:sales@fsrinc.com)



Specifications are subject to change without notice.