



NOTICE: FOR INSTALLATION BY A QUALIFIED ELECTRICIAN IN ACCORDANCE WITH ALL NATIONAL AND LOCAL ELECTRICAL CODES AND COMMUNICATIONS STANDARDS. ADHERE TO THE FOLLOWING INSTRUCTIONS AND ANY INSTRUCTIONS INCLUDED WITH THE INDIVIDUAL RACEWAY COMPONENTS.

CAUTION: ENSURE EDGE OF RACEWAY COVER IS DEBURRED.


1. MAKE CUT-OUT IN WALL AND CUT/FOLD DOWN SILL PLATE.
2. DROP WIRES/CABLES (PROVIDED BY OTHERS) BEHIND WALL AND ROUTE THRU OPENING.

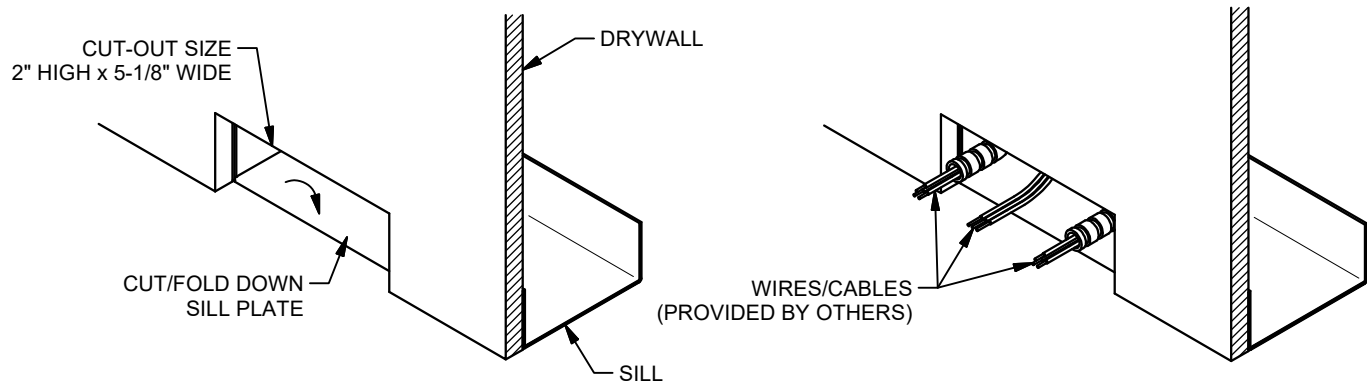


3. ATTACH FITTING (PROVIDED BY OTHERS) AS REQUIRED.
4. SECURE ANY FITTINGS IF REQUIRED TO CHASSIS AND POSITION CHASSIS AGAINST DRYWALL.

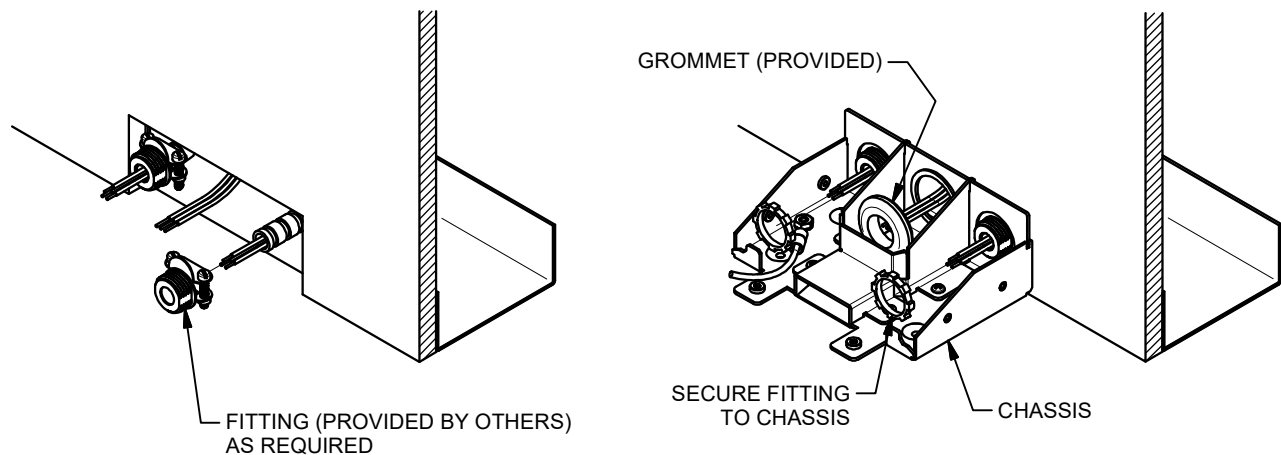


5. SECURE CHASSIS TO FLOOR (HARDWARE SOLD SEPARATELY).

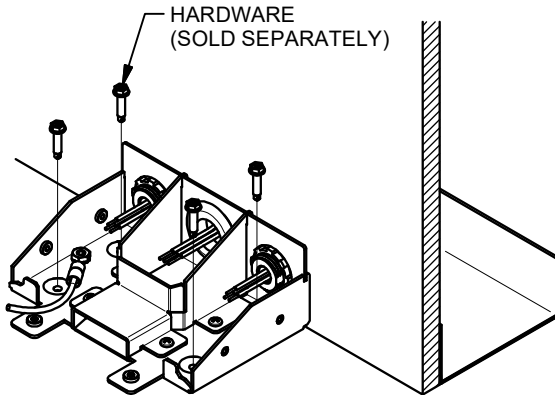

6a. INSTALL RACEWAY BASE (SOLD SEPARATELY) AND SECURE TO CHASSIS BY TIGHTENING SET SCREWS. WIRE AND MAKE ELECTRICAL CONNECTIONS AS REQUIRED.

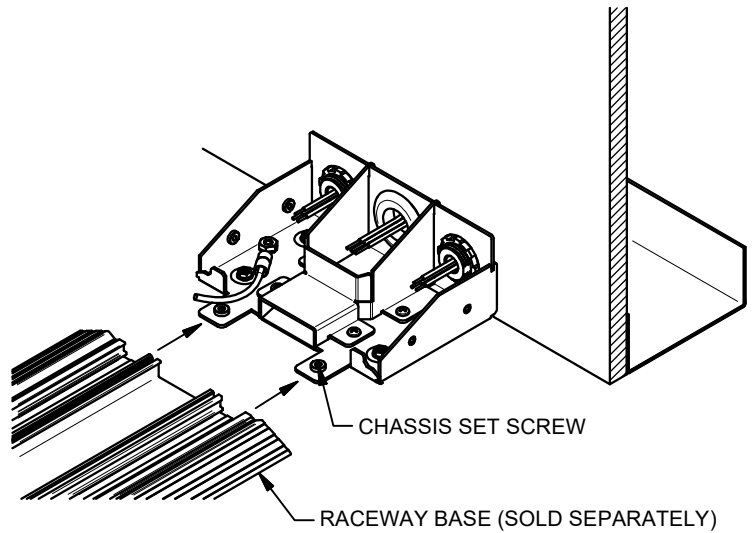

6b. DIVIDERS ARE REMOVABLE FOR EASE OF ROUTING WIRES OR IF CHASSIS IS TO CONTAIN A SINGLE VOLUME OR WIRING.

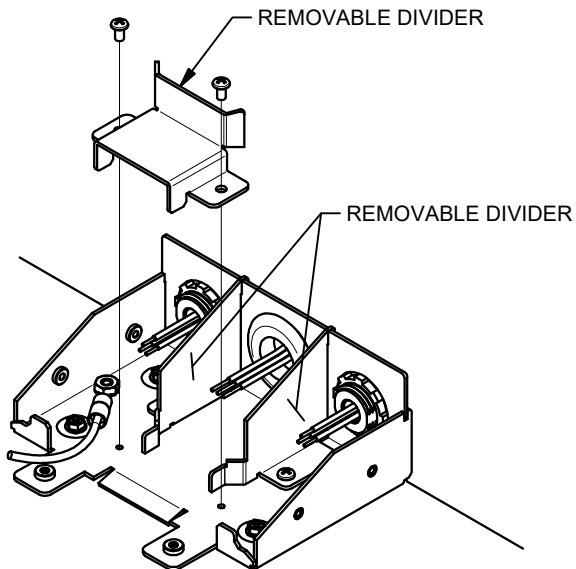

7. INSTALL RACEWAY COVER AND THEN INSTALL CHASSIS COVER.

