T3 TABLE BOX COMPARISON GUIDE

T3-AC2 / AC2HW



T3-AC2CP / AC2HWCP



T3-DV2S




T3-IPS



T3-4SS




T3-CAT5

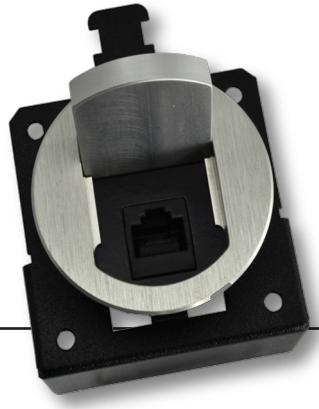

T3-MJ+ family



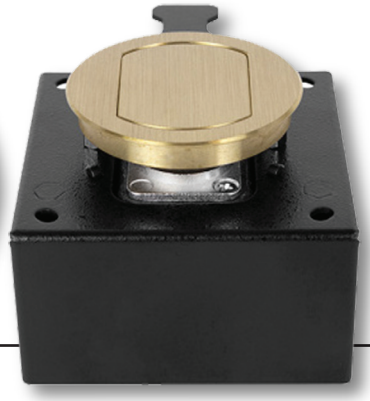

T3U-3R-BLK



FSR Inc.

244 Bergen Boulevard, Woodland Park, NJ 07424 · Phone: 973.998.2300 · Fax: 973.785.4207
Web: www.fsrinc.com · E-mail: sales@fsrinc.com · Order Desk: 1-800-332-FSR1

MADE IN THE USA

GREEN

Objects pictured are not to scale.

LIT????

T3 Table Box Comparison Guide

Model	Box shape / table opening	Table thickness	Configuration information	Insert capacity	Cover / finish	Retractor compatibility
T3-AC2 / AC2HW	3.50" round opening	Plug-in: 0.75-2.50". Hardwired: 1.00-2.50"	2 AC outlets + 2 RJ45 pass-through ports. Corded or hardwired input; CAT6 variant available	2 keystone positions, supplied with RJ45 connectors; 2 fixed AC outlets	BLK, ALM, or BRS	N/A
T3-AC2CP / AC2HWCP	3.50" round opening	0.75-2.50"	2 AC outlets + 2 factory-installed CAT5e pull-out cables. Corded or hardwired AC input	N/A for modular inserts; factory-populated AC/cable-pull configuration	Brushed BLK or ALM	N/A; cable pulls are not mechanical retractors
T3-DV2S	3.50" round opening	No buttons: 0.75-2.50". Buttons: 1.00-2.50"	1 AC outlet + 1 HDMI bulkhead + 2 keystone openings; optional 1 or 2 buttons/LEDs	2 SS/keystone openings, supplied with blanks; fixed HDMI and AC	BLK, ALM, or BRS	N/A
T3-IPS	3.50" round opening		2-space IPS interface or supplied single/dual cable-pull brackets; optional 1 or 2 buttons/LEDs	2 IPS spaces OR single/dual cable-pull bracket configuration	BLK, ALM	1 TBRT with T3-IPS-RTMKT. Cable Pilot not specified
T3-4SS	3.50" round opening	0.75-2.50"	Four SS/keystone connector openings; four snap-in blanks supplied	4 SS/keystone positions; connectors sold separately	BLK	N/A
T3-CAT5	2.00" round opening	1.00-2.50"	Single RJ45 feed-through connection in a compact table box	1 factory-mounted RJ45 connector; no T6 bracket positions	BLK, ALM, or BRS	N/A
T3-MJ+ family	2.00" round opening	T3-MJ+: 0.63-2.13". 1B: 1.00-2.13".	Acoustically isolated microphone connection; 1-/2-button and built-in mute variants. Microphone not included.	1 microphone position; connector and button arrangement by model. N/A for modular T6/IPS inserts	BLK, ALM, or BRS hinged round cover	N/A
T3U-3R-BLK	8.00" x 5.38" rectangular opening	0.75-2.75"	Tilt-up box with 4 AC outlets; interchangeable T3U-3 connection plate	1 T3U-3 plate: 6 SS, or 4 SS + HD15, or blank; plus 4 fixed AC outlets.	BLK tilt-up rim cover	N/A