
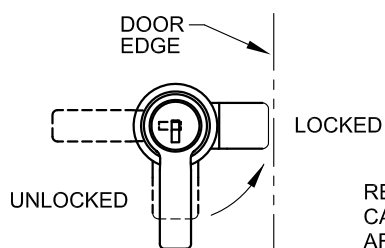


- ① REMOVE LOCK ASSEMBLY FROM BAG, THEN REMOVE SCREW, CAM AND NUT FROM LOCK.





- ③ INSTALL NUT ON LOCK HOUSING

- ④ ORIENT CAM TO THIS POSITION, WITH BEND TOWARDS THE LOCK, AND SECURE ON LOCK WITH SCREW

- ② MAKE SURE LOCK HOUSING (NOTE LOCK PIN LOCATION) AND HANDLE ARE ORIENTED AS SHOWN, THEN SLIP LOCK ASSEMBLY INTO DOOR HOLE.

HANDLE LOCK INSTALLATION

- ① REMOVE LOCK ASSEMBLY FROM BAG, THEN REMOVE C-CLIP FROM LOCK AND REMOVE CAM.

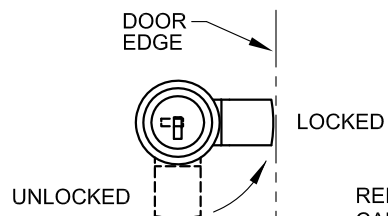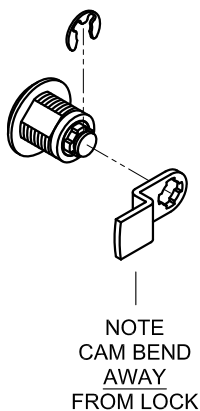

- ③ INSTALL NUT ON LOCK HOUSING

- ④ ORIENT CAM TO THIS POSITION, WITH BEND TOWARDS THE LOCK, AND SECURE ON LOCK WITH C-CLIP

- ② INSERT KEY, ROTATE HOUSING TO LEFT-HAND LIMIT, ORIENT KEY PARALLEL TO TOP OR BOTTOM DOOR EDGE, THEN SLIP LOCK ASSEMBLY INTO DOOR HOLE.



FLUSH LOCK INSTALLATION