

## HDMI® 4K Digital Ribbon Cable



Video Products Group



with

# CoilGuard™

### DESCRIPTION

FSR's 4K Next Generation Digital Ribbon Cables with CoilGuard utilize a proprietary technology to allow high speed, high definition HDMI® signal transmission over distances of up to 328 ft. This durable cable is fitted with a discreet stainless steel reinforced inner jacket and an outer black jacket that allows the cable to withstand rough service during and to blend in after installation. The hybrid fiber/copper cables deliver a speed of 18 Gb/sec video bandwidth. They can easily handle up to 4k 60Hz 4:4:4 HDR uncompressed HDMI® video and are ARC compatible. The cables come pre-terminated in convenient lengths. These advanced technology cables use four glass fibers, seven copper wires and supply the necessary power to the embedded circuitry at both ends of the cable. They meet the HDMI® / HDCP testing standards. The connector shells are labeled "source" and "display" to aid in proper connections.



### FEATURES

- Stainless steel reinforced construction
- Enhanced pull strength of 100 lbs.
- Suitable for Rough Service. Short term load limit of 2000N/100mm (450lbs./4")
- HDMI® with 4k@60Hz YUV 4:4:4 and supports all HDCP versions
- Overcomes distance limitations of conventional HDMI® cables
- Competitive in cost to older cable types
- Signal integrity is uncompromised
- Multi-format compatibility
- No external power or special tooling required
- Cable and connectors easily fit within a 1" conduit
- Supports DDC for HDCP and EDID
- Supports PCM, Dolby, DTS-HD & True HD audio
- ARC compatible

### APPLICATIONS

Great for temporary or permanent installation in high traffic areas like:

- Auditoriums
- Concert Halls
- Terminals
- Common Areas
- Hospitality
- Training Rooms
- Trade Shows
- Rentals

### ORDERING INFORMATION

Item #	Part#	Description	Meters	Feet
18171	DR-H2.0-SR-50M	4K Steel Reinforced BLK AOC	50	165
18172	DR-H2.0-SR-70M (MTO)	4K Steel Reinforced BLK AOC	70	230
18173	DR-H2.0-SR-100M (MTO)	4K Steel Reinforced BLK AOC	100	328



Specifications are subject to change without notice.

### FSR Inc.

244 Bergen Boulevard, Woodland Park, NJ 07424  
 Phone: 973.998.2300 · Fax: 973.785.4207  
 Web: www.fsrinc.com · E-mail: sales@fsrinc.com  
 Toll Free: 1-800-332-FSR1


LIT1741F

## SPECIFICATIONS

Performance Characteristics	
Video Connectors	Male HDMI®
Maximum Length	328' (100 meters)
Cable Dimensions	See dimension drawings below
Compliance	RoHS, UL444, CSA C22.2 No. 214, UL 746A
HDMI Cable Type	High-Speed HDMI®
Total Power Consumption	0.25 Watts
Endurance at Bend Radius	Over 10k cycles at 2" (50 mm) Radius
Minimum Bend Radius	0.5" (12.7mm)
Maximum Tensile Load	100 lbs.
Environmental Performance	
Operating Temperature Range	+32° F to +122° F (0 ° to +50°C)
Maximum Operating Humidity	85%
Storage Temperature Range	-22° to +122° F (-30° to +50°C)
Product Specifications	
<ul style="list-style-type: none"> <li>Up to 4k 60Hz 4:4:4 HDR uncompressed HDMI video</li> </ul>	<ul style="list-style-type: none"> <li>Supports DDC for HDCP and EDID</li> </ul>
<ul style="list-style-type: none"> <li>3D</li> </ul>	<ul style="list-style-type: none"> <li>HDMI-CEC</li> </ul>
<ul style="list-style-type: none"> <li>Deep Color</li> </ul>	<ul style="list-style-type: none"> <li>ARC compatible</li> </ul>
<ul style="list-style-type: none"> <li>18 Gb/sec video bandwidth</li> </ul>	<ul style="list-style-type: none"> <li>Supports PCM, Dolby, DTS-HD and True HD audio</li> </ul>

**\*\*4k 60Hz 4:4:4 performance requires a direct connection from source to display.**

## APPLICATIONS

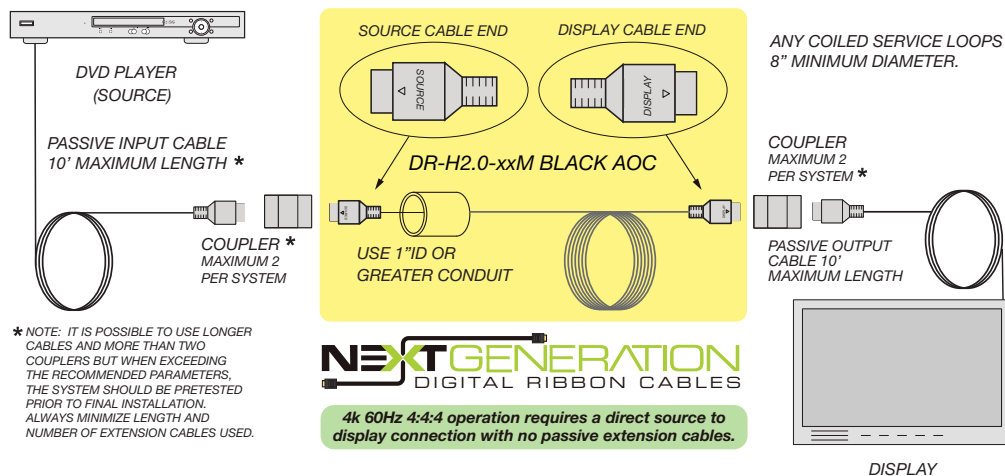


### IMPORTANT:

Do not use any pulling method that will result in a localized twisting of the cable or damage will result and the warranty will be voided.

The DR-SOCK is perfect protection for pulling pre-connectorized cable through conduit, and can be used over and over.



## DIMENSIONS

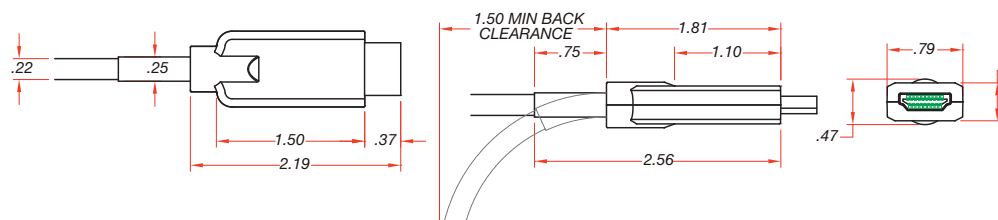

## FSR Inc.

244 Bergen Boulevard,  
Woodland Park, NJ 07424  
Phone: 973.998.2300  
Fax: 973.785.4207  
Web: [www.fsrinc.com](http://www.fsrinc.com)  
E-mail: [sales@fsrinc.com](mailto:sales@fsrinc.com)  
Toll Free: 1-800-332-FSR1