

HDBaseT™ 70 Meter HD-H704K-SP Ultra Slim-Pack Transmitter & Receiver Set

- Visually Lossless Compression enables 4K@60 HDR extension over HDBaseT
- Via Cat 6a/7 cables, 4Kx2K@60Hz output up to 40m, while 1080P up to 70m
- Via Cat 5e/6 cables, 4Kx2K@60Hz output up to 35m, while 1080P up to 60m
- HDMI 2.0 with 4k@60Hz YUV 4:4:4 and HDCP 2.2 compliance
- Bi-directional PoE, only one power adapter is needed at either TX or RX side
- Two-way RS-232 pass-through over HDBaseT
- Two-way IR pass-through over HDBaseT
- Automatic EDID management
- All connections on same side of the device
- Visual LED indication (POWER, STATUS, HDCP, LINK)
- 18V DC power

Transmission Distance



Note: T568B straight-through Category cable is recommended.

Cable Type	Range	Supported Video
Cat 5e/6	60m/200ft	1080P@60Hz 36bpp
	35m/115ft	1080P@60Hz 48 bpp,
		1080P@60Hz 3D,
		4K@60 Hz
Cat 6a/7	70m/230ft	1080P@60Hz 36bpp
	40m/130ft	1080P@60Hz 48 bpp,
		1080P@60Hz 3D,
		4K@60 Hz

Package includes:

HD-H704K-SP-Tx Transmitter,
HD-H704K-SP-Rx Receiver
18VDC 1A Power Supply,
Under Table Mounting Brackets
1 IR Emitter Cable, 1 IR Receiver Cable

SUPPORTS
4K@60 4:4:4

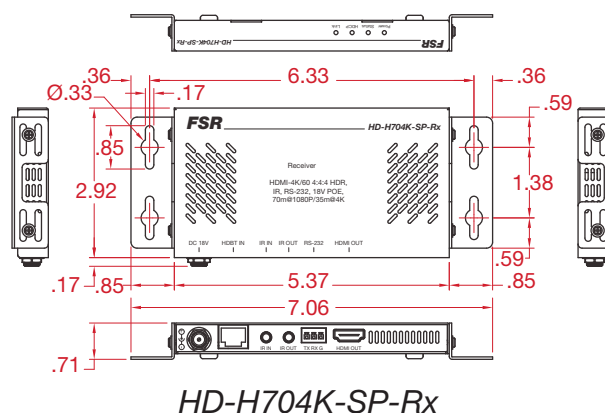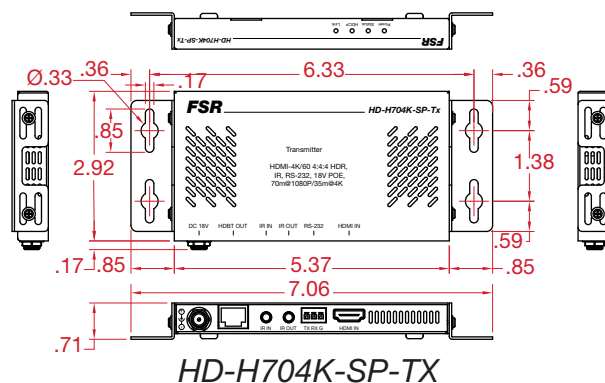

FSR is now stocking **West Penn HDBaseT Certified Category 6A Plenum Cable Assemblies** in pre-terminated lengths from 50' to 330' (15 meter to 100 Meter). These plenum rated cables come in specific lengths with the shielded connectors already attached and will work with all of our FSR HDBaseT™ Products.



Specifications are subject to change without notice.
HDBaseT™ and the HDBaseT Alliance logo are trademarks of the HDBaseT Alliance.



244 Bergen Boulevard, Woodland Park, NJ 07424
Phone: 973.998.2300 · Fax: 973.785.4207
Web: www.fsrinc.com · E-mail: info@fsrinc.com LIT1828