

DV-HXT-2

HDMI to CAT-x Tx/Rx Converter

FSR

Video Products Group


DV-HXT-2



Connect with Confidence

The DV-HXT-2 converts HDMI to two CAT-x cable for simplified installations and lower cabling cost. It extends HDMI signals with CAT-6 cable at 1080i up to 200 feet (60m) and at 1080p up to 165 feet (50m) from the source*. Using CAT-5e it extends HDMI signals at 1080i up to 165 feet (50m) and at 1080p up to 130 feet (40m) from the source*.

*Source Signal Dependent

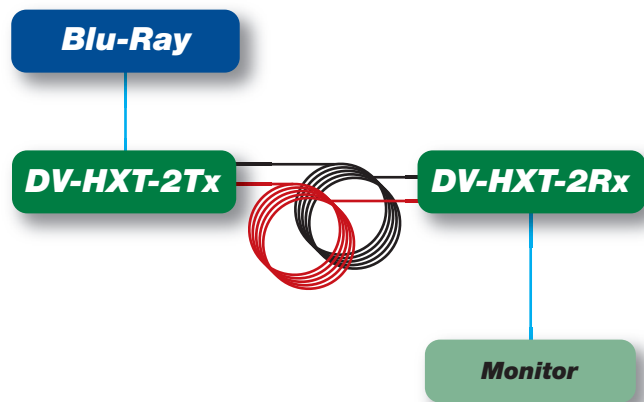

APPLICATIONS

- Video Wall System
- Large LED Sign Board
- Medical Imaging Equipment
- TV Broadcast Station
- Auditorium
- Conference Room
- Church Video System

FEATURES

- HDMI V1.3
- HDCP V2.1
- Extends HDMI signals with CAT 6 cable at 1080i up to 200 feet (60m) and at 1080p up to 165 feet (50m) from the source*
- Extends HDMI signals with CAT 5e cable at 1080i up to 165 feet (50m) and at 1080p up to 130 feet (40m) from the source*
- Audio and video are digitally transmitted
- LED Feedback for Signal Verification

SPECIFICATIONS

- Bandwidth: 25~165 MHz
- HDTV Resolutions: 480p, 720p, 1080i/p
- VESA Standard Resolutions to UXGA (1600x1200) @ 60Hz
- Connector Type: HDMI TYPE A Female / RJ-45
- External 5V power supply adapter included
Power Supply: DC 5V, 2.0A
- Power Consumption: 5 Watts (Max.)
- Operating Temperature & Humidity: 0-40°C, Less than 80% Humidity
- Dimensions (WxDxH) : 2.75in (70mm) x 2.48in (63mm) x 1.06in (27mm)
- Weight: 0.33 lb (0.15 kg) for each of Tx and Rx



Specifications are subject to change without notice.

FSR Inc.

244 Bergen Boulevard, Woodland Park, NJ 07424
Phone: 973.785.4347 · Fax: 973.785.4207
Order Desk: 1-800-332-FSR1
Web: www.fsrinc.com · E-mail: sales@fsrinc.com