



6. APPLY FIRE-RATED SEALANT THROUGH FLANGE OPENINGS AND ALSO BETWEEN BOX FLANGE AND DRYWALL. ENSURE SEALANT OCCUPIES ALL OF THE GAP BETWEEN THE BOX FLANGE AND THE DRYWALL MINIMUM 1/8" THICKNESS (REFER TO SECTIONAL VIEW). WIPE ANY EXCESS SEALANT FROM BOX FLANGE AFTER APPLICATION. USE 3M FIRE BARRIER SEALANT CP 25WB+.

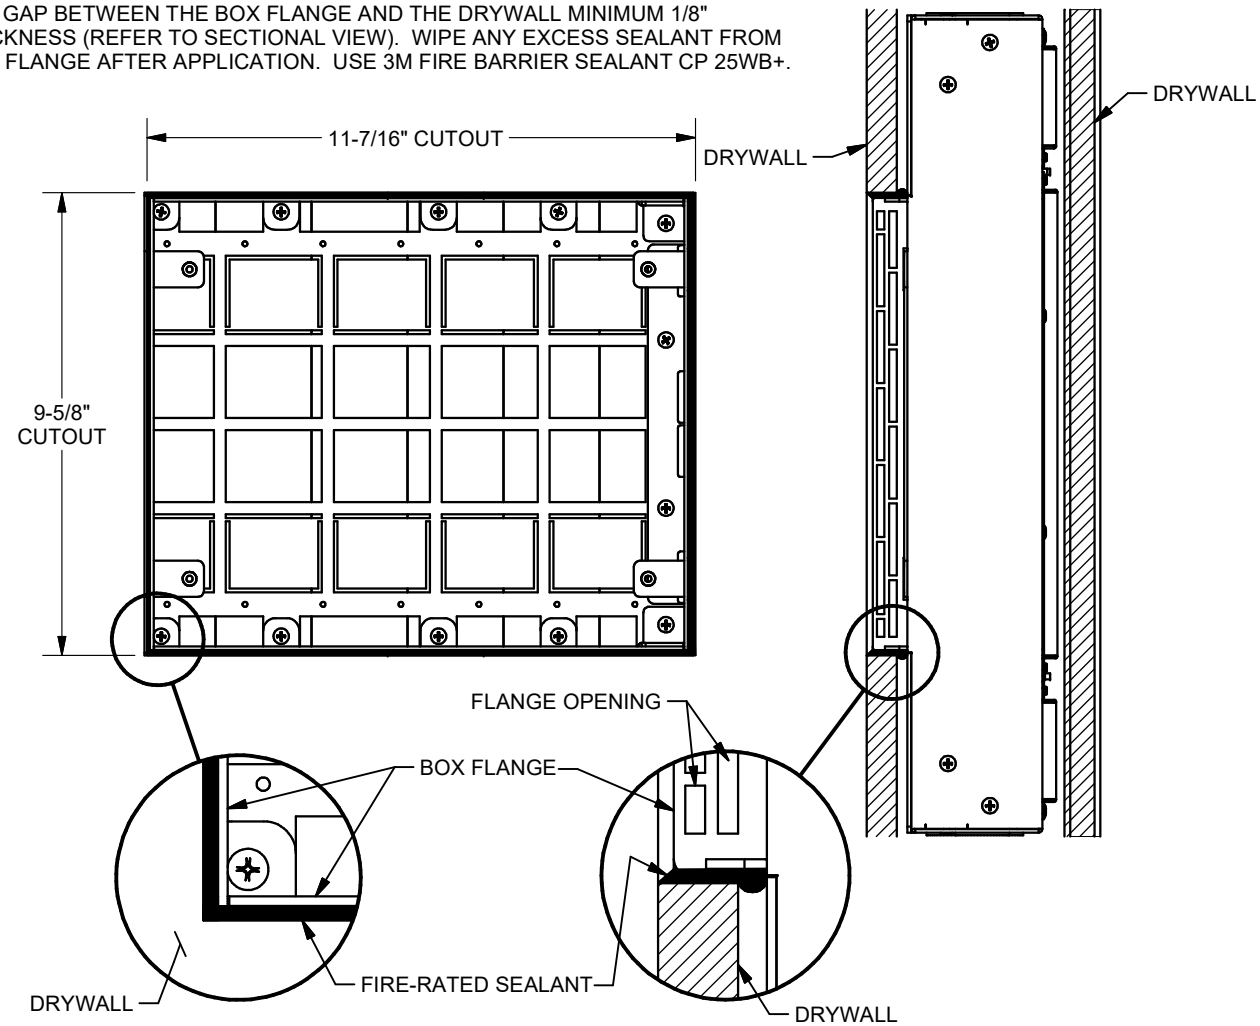


7. COVER HAS TO BE REMOVED FROM RIM BEFORE RIM CAN BE INSTALLED TO WALL BOX.

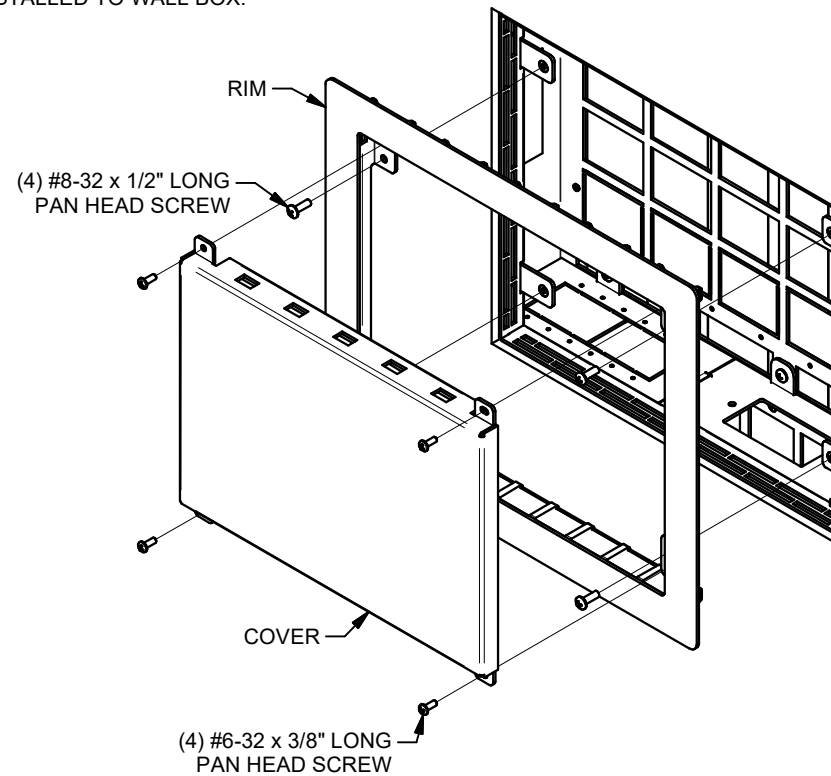


# FSR PWB-FR-450 INSTALLATION INSTRUCTIONS

244 Bergen Boulevard, Woodland Park, NJ 07424, Phone: 973.785.4347 - Fax: 973.785.4207

1. BREAK STUD BRACKETS OFF METAL TREE AND INSTALL ONTO WALL BOX.

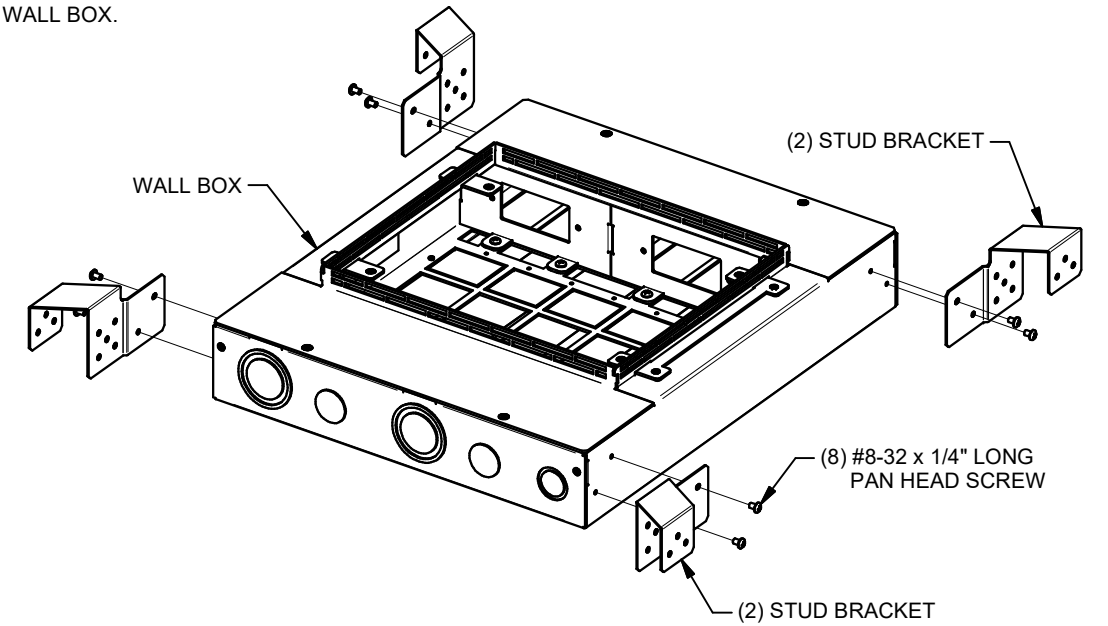


2. INSTALL WALL BOX ONTO STUDS AND SECURE WITH HARDWARE (BY OTHERS) AS REQUIRED.

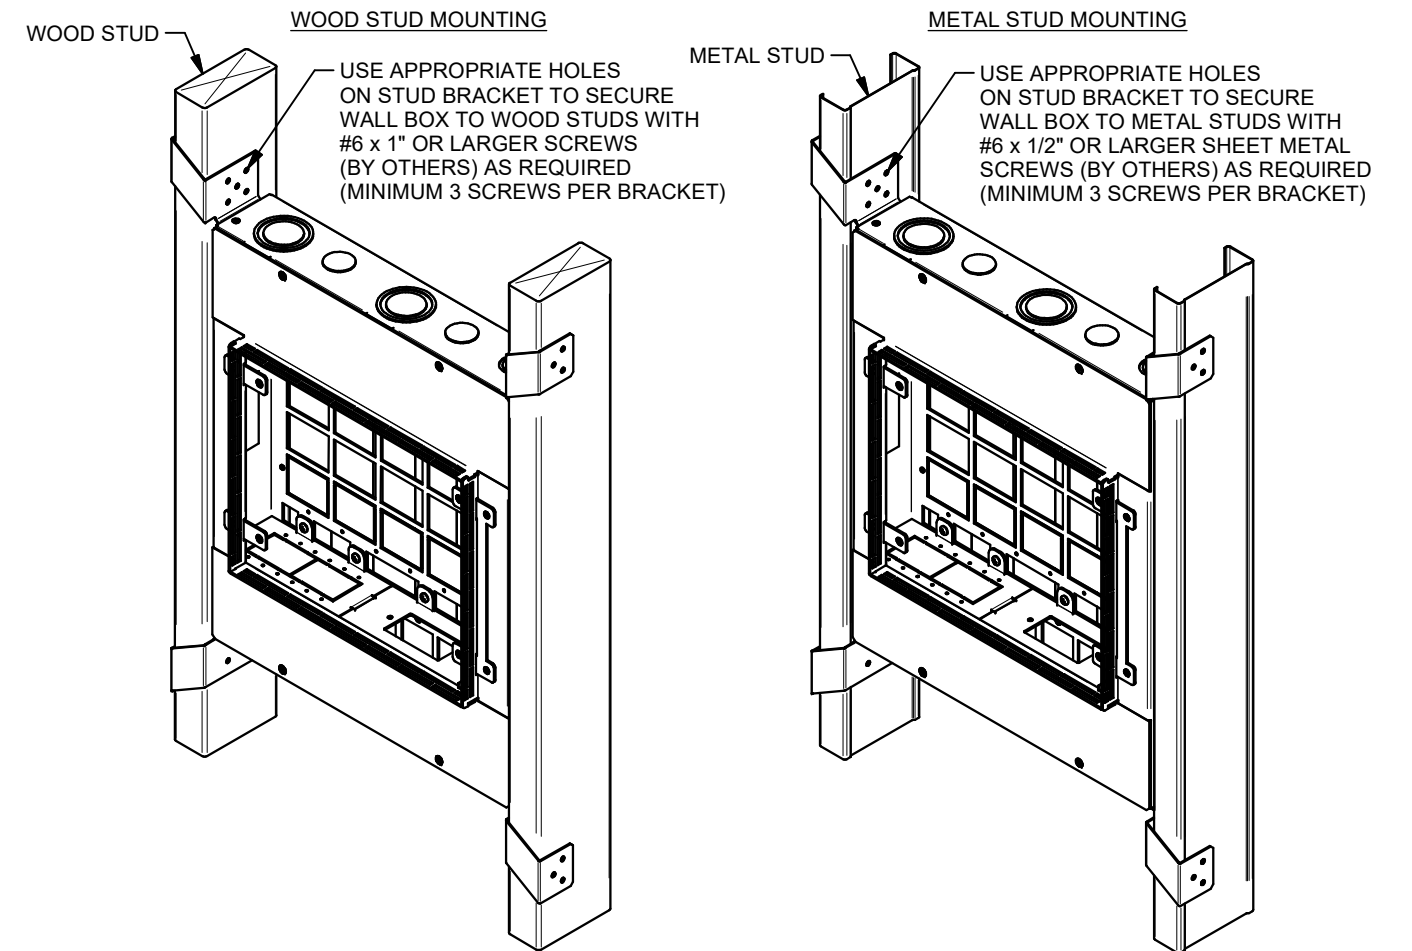


MINIMUM TWO STUDS REQUIRED 16" ON CENTER. ADDITIONAL STUDS MAY BE ADDED AS NEEDED.

3. REMOVE BACKBOX COVERS AND ROUTE CONDUITS TO WALL BOX AS REQUIRED.

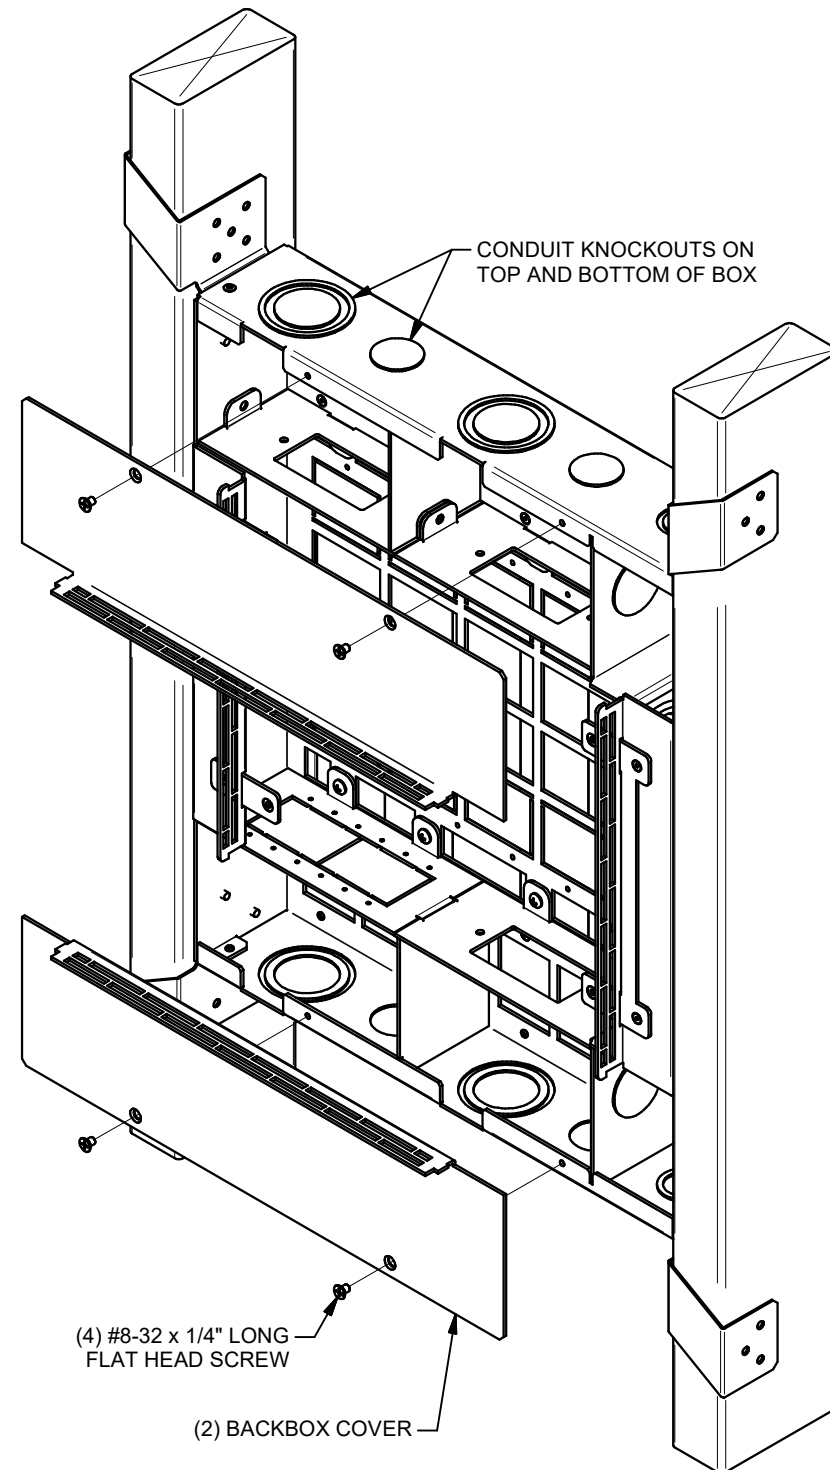

4. PER CUSTOMER SPECIFICATIONS CONFIGURE WALL BOX INTERFACE PLATES AS REQUIRED. INTERFACE PLATES AND DIVIDERS ARE REMOVABLE IF REQUIRED. REMOVE AC PANEL ASSEMBLY AND MAKE ELECTRICAL CONNECTIONS AS REQUIRED. GROUND SCREW TYPICAL OF 4 TIGHTEN TO 25-30 LBF-IN.

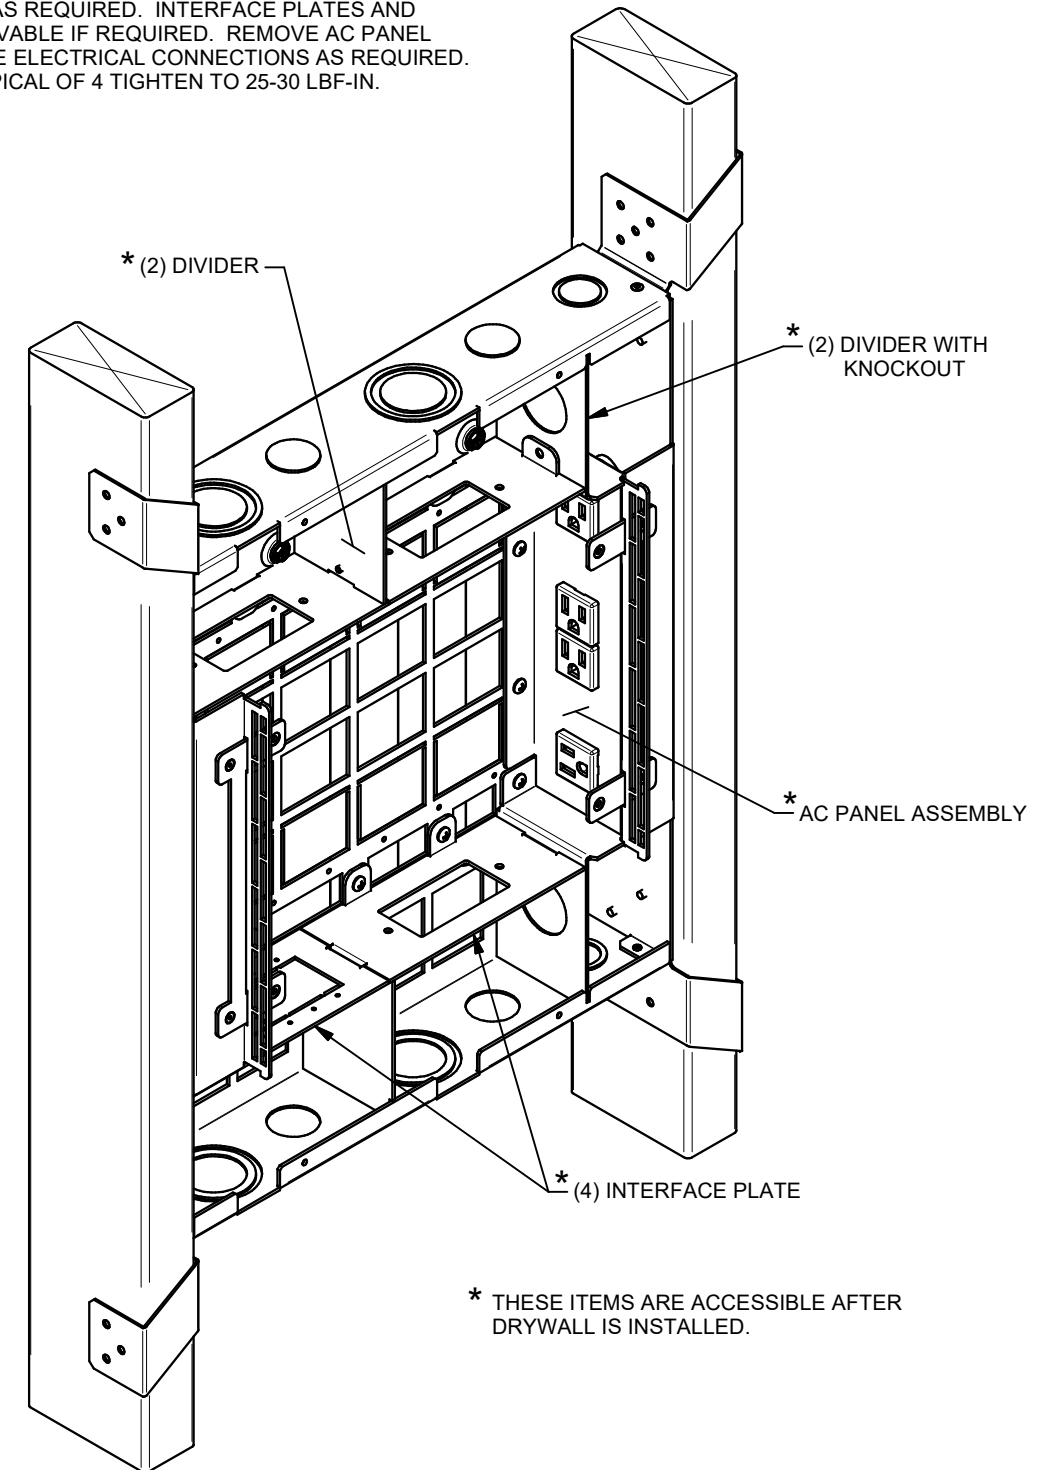

5. INSTALL INTUMESCENT PUTTY PADS AS REQUIRED PER LIT1612 (43304). REINSTALL BOTH BACKBOX COVERS SHOWN IN STEP 3 BEFORE MOUNTING DRYWALL.